


HYDRODYNAMIC AUTOMATIC BAR FEEDER



U 120

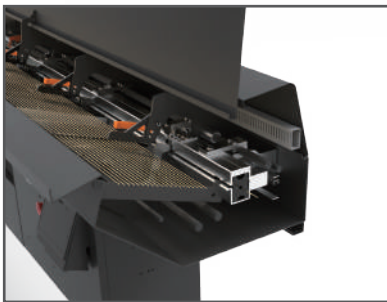


雙尺寸快拆耐磨膠管

滿足多尺寸送料設計，快速拆換提高生產效率，採真圓式料管包覆加工材料，有效使材料同心圓旋轉，降低加工振幅。

Double Sizes Polyurethane Guide Channels

Quick-change guide channel with two sizes in a guide channel improves efficiency and reduce vibration and noise.

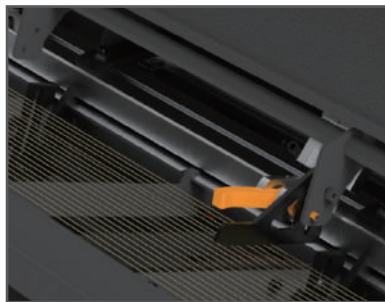


進齒式下料系統

專為4mm以下細棒材開發之下料模式，排料簡單，確保單支下料。

Sawtooth Loading System

Unique and special design for bar under 4mm to prevent gluing situation.

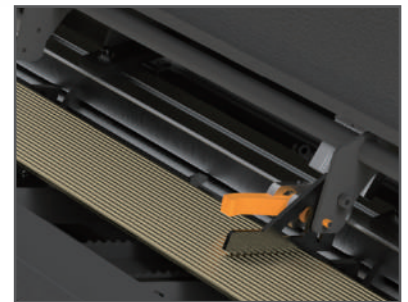

快速變換大棒材下料模式


5mm材料最多置放50支，免工具快速更換。

Quick Change Mechanism

Fast change to 5mm(above) materials magazine without using tools.

Specifications

棒材直徑	Bar Diameter	 0.8mm(1/32") ~ 20mm(25/32")  2mm(5/64") ~ 17mm(11/16")
膠管尺寸	Channel Size	Ø6 / Ø11 Ø6 / Ø14 Ø8 / Ø18 Ø8 / Ø22
棒材容量	Rack Capacity	Ø1~4 x 21支(Bar) Ø5 x 43支(Bar)
油箱容量	Oil Tank Capacity	40L
電源供應	Power Supply	220/440VAC 50/60Hz
空壓供應	Bar Diameter	5~7 kg/cm ²

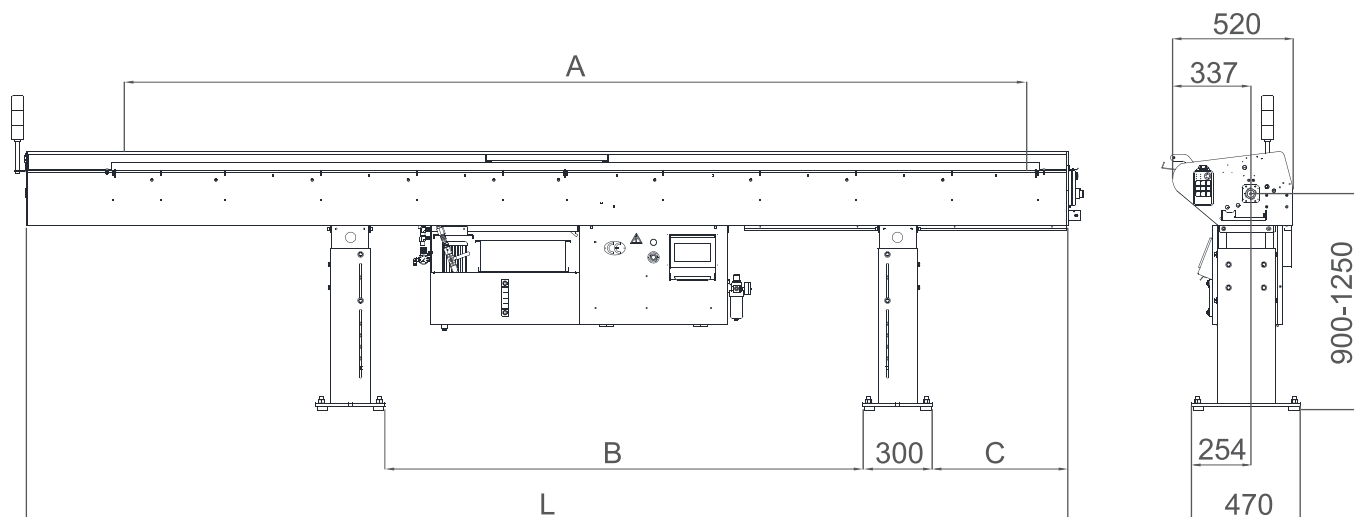

Model	27	32	37
L	3393mm	3811mm	4518mm
A	2700mm	3200mm	3900mm
B	1820mm	1642mm	1990mm
C	320mm	525mm	592mm
重量 Weight	390KG	425KG	435KG



鐳羅機械股份有限公司
PRO MACHINERY CO., LTD.
 551 南投縣名間鄉濁水村磨坑巷1-1號
 No. 1-1, Mokeng Ln., Mingjian Township,
 Nantou County 551, Taiwan (R.O.C.)



2 0 2 4 1 1

設計如有變更 均不另行通知 Desgin and specifications are subject to change without prior notice.