


HYDRODYNAMIC AUTOMATIC BAR FEEDER



C 551

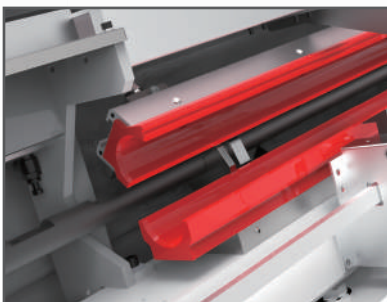


快拆耐磨膠管

膠管細粗棒才一次解決，快速拆卸定位，縮短交換時間，降低噪音、減少震動、提高效益。

Polyurethane Guide Channels

Quick-change guide channel improves efficiency and reduce vibration and noise.

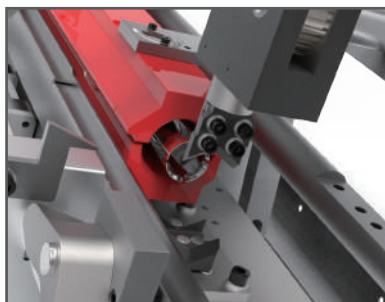


免調整夾刀入料機構

免調整夾刀，自動定位入料中心，節省更換棒材時間4片式夾爪機構，夾持力穩固不鬆脫。

Self-Centering Clamping System

“Self-centers” clamping design provide firm clamping force and no adjustment while bar size changes.

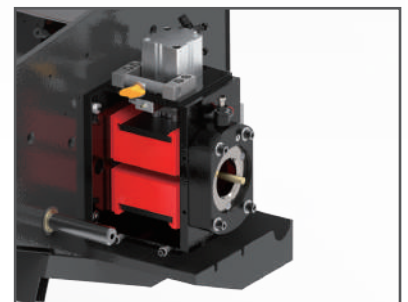

防震機構


夾塊式防震，免調整更換容易。降低噪音、減少震動、提高轉速。

Anti-Vibration Device

Clamps design for easy changing and needn't adjustment. Reduce the noise and vibration but increase rotation speed.

Specifications

棒材直徑	Bar Diameter	 5mm(3/16") ~ 51mm(2")  5mm(3/16") ~ 51mm(2")
膠管尺寸	Channel Size	13 / 17 / 21 / 26 / 28 / 33 / 36 / 38 / 39 / 43 / 46 / 52
棒材容量	Rack Capacity	305mm Ø10 x 30支(Bar)
油箱容量	Oil Tank Capacity	60L
電源供應	Power Supply	220/440VAC 50/60Hz
空壓供應	Bar Diameter	5~7 kg/cm ²

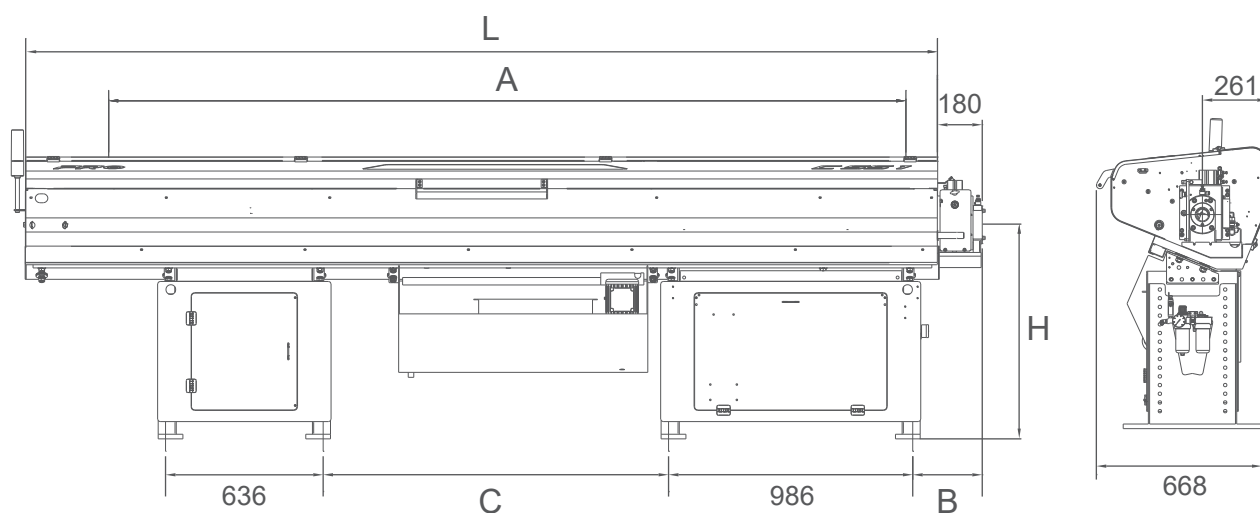

Model	25	32	37	40
L	3020mm	3680mm	4222mm	4552mm
B	276mm	284mm	574mm	574mm
C	1309mm	1309mm	1559mm	1859mm
H	850~1300mm			
A 最大棒材長度 Max. Bar Leng	2600mm	3260mm	3800mm	4100mm
重量 Weight	850KG	900KG	950KG	1000KG



鐳羅機械股份有限公司
PRO MACHINERY CO., LTD.
 551 南投縣名間鄉濁水村磨坑巷1-1號
 No. 1-1, Mokeng Ln., Mingjian Township,
 Nantou County 551, Taiwan (R.O.C.)



設計如有變更 均不另行通知 Desgin and specifications are subject to change without prior notice.

TEL: +886-49-2730888 | FAX: +886-49-2730999 | E-mail: prosales@probar.com.tw