


HYDRODYNAMIC AUTOMATIC BAR FEEDER



H 326

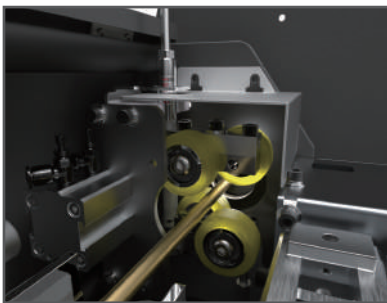


前端防震

降低噪音、減少震動、提高轉速。

Anti-Vibration Device

Free of vibration and noise increase speed.

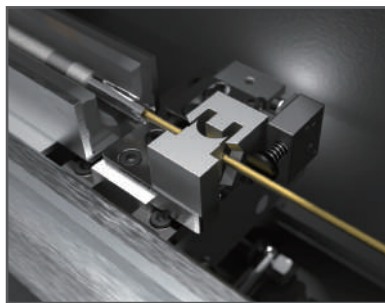


夾刀入料機構

免調整夾刀，自動定位入料中心，節省更換不同棒材時間四片式夾爪機構，細棒材夾持穩定不彎曲。

Self-Centering Clamping System

“Self-centers” clamping design provide firm clamping force and no adjustment while bar size changes.

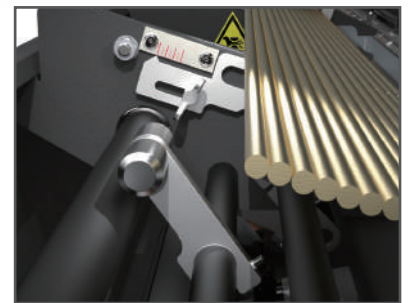

快速調整機構


更換不同大小棒材，快速調整，省時省力。

Quick Adjustment Mechanism

Replace bars of different sizes and adjust quickly, saving time and effort.

Specifications

機型	Type		HP-12	HP-16	HP-20	HP-23	HP-26
棒材直徑	Bar Diameter		Ø3~12mm (1/8" - 1/2")	Ø3~16mm (1/8" - 5/8")	Ø3~20mm (1/8" - 25/32")	Ø3~23mm (1/8" - 7/8")	Ø5~26mm (3/16" - 1")
棒材直徑	Bar Diameter		1.5~11mm (1/16" - 7/16")	4~14mm (3/16" - 9/16")	4~17mm (3/16" - 11/16")	4~19mm (3/16" - 13/16")	4~21mm (3/16" - 27/32")
膠管尺寸	Channel Size		Ø14	Ø18	Ø22	Ø24	Ø28
棒材容量	Rack Capacity		260mm Ø10 x 26支(Bar)				
油箱容量	Oil Tank Capacity		40L				
電源供應	Power Supply		220/440VAC 50/60Hz				
空壓供應	Bar Diameter		5~7 kg/cm ²				

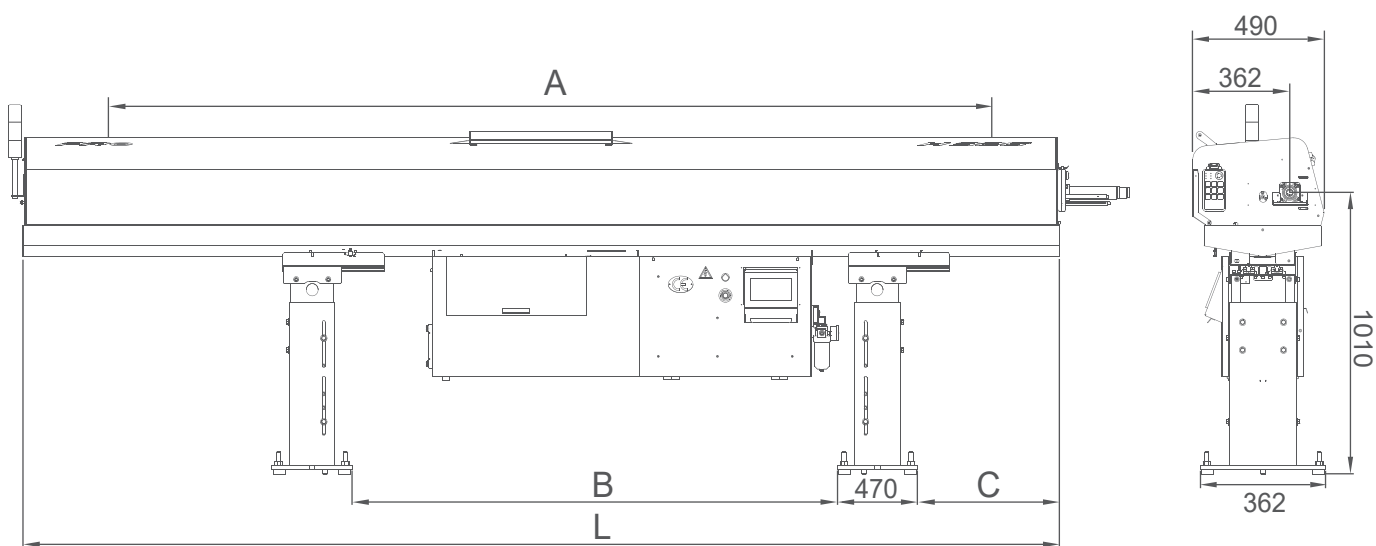

Model	22	27	32	37	40	44
L	2830mm	3340mm	3870mm	4370mm	4710mm	4970mm
A 最大棒材長度 Max. Bar Leng	2200mm	2700mm	3200mm	3800mm	4000mm	4400mm
B	1510mm	1740mm	1810mm	2178mm	2528mm	2478mm
C	345mm	452mm	452mm	583mm	578mm	884mm
重量 Weight	380KG	450KG	520KG	600KG	650KG	700KG



鐳羅機械股份有限公司
PRO MACHINERY CO., LTD.
 551 南投縣名間鄉濁水村磨坑巷1-1號
 No. 1-1, Mokeng Ln., Mingjian Township,
 Nantou County 551, Taiwan (R.O.C.)



設計如有變更 均不另行通知 Desgin and specifications are subject to change without prior notice.

TEL: +886-49-2730888 | FAX: +886-49-2730999 | E-mail: prosales@probar.com.tw