

HYDRODYNAMIC AUTOMATIC BAR FEEDER



RAY 326



夾刀入料機構

免調整夾刀，自動定位入料中心，節省更換棒材時間4片式夾爪機構，夾持力穩固不鬆脫。

Self-Centering Clamping System

"Self-centers" clamping design provide firm clamping force and no adjustment while bar size changes.




防震機構

降低噪音、減少震動、提高轉速。
可更換夾塊式防震，免調整更換容易。

Anti-Vibration Device

Minimizes vibration and noise effectively. Removable clamping anti-vibration, easy to change without any adjustments.

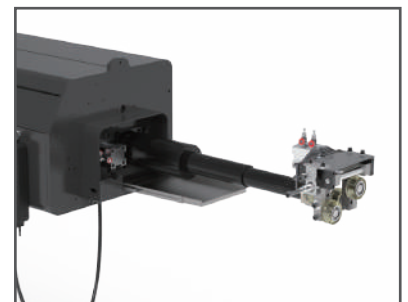

伸縮套管


配合走心式車床使用。

Telescopic Nose

Special design for swiss lathe to prevent disorting materials and to centering the material with the spindle.

Specifications

機型	Type	RAY-12	RAY-16	RAY-20	RAY-23	RAY-26
棒材直徑	Bar Diameter 	Ø3~12mm (1/8" - 1/2")	Ø3~16mm (1/8" - 5/8")	Ø3~20mm (1/8" - 25/32")	Ø3~23mm (1/8" - 7/8")	Ø5~26mm (3/16" - 1")
棒材直徑	Bar Diameter 	4~11mm (1/16" - 7/16")	4~14mm (3/16" - 9/16")	4~17mm (3/16" - 11/16")	4~19mm (3/16" - 13/16")	4~21mm (3/16" - 27/32")
膠管尺寸	Channel Size	Ø14	Ø18	Ø22	Ø24	Ø28
棒材容量	Rack Capacity	200mm Ø10 x 20支(Bar)				
油箱容量	Oil Tank Capacity	40L				
電源供應	Power Supply	220/440VAC 50/60Hz				
空壓供應	Bar Diameter	5~7 kg/cm ²				

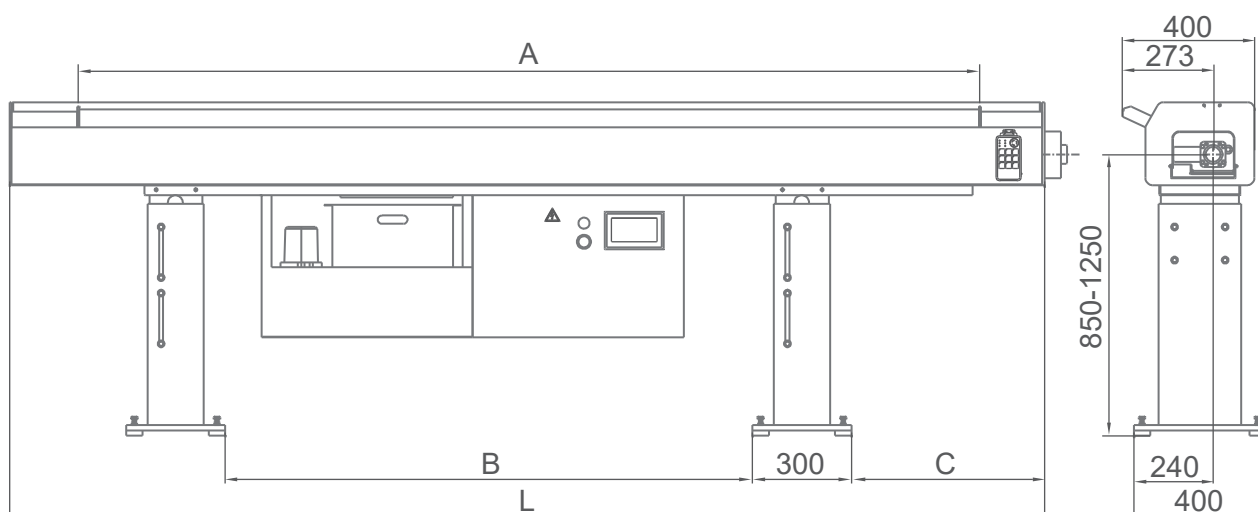

Model	27	32	37
L	3278mm	3808mm	4308mm
A 最大棒材長度 Max. Bar Leng	2700mm	3200mm	3800mm
B	1595mm	1595mm	2095mm
C	584mm	584mm	584mm
重量 Weight	365KG	385KG	410KG



鐳羅機械股份有限公司
PRO MACHINERY CO., LTD.
 551 南投縣名間鄉濁水村磨坑巷1-1號
 No. 1-1, Mokeng Ln., Mingjian Township,
 Nantou County 551, Taiwan (R.O.C.)



設計如有變更 均不另行通知 Desgin and specifications are subject to change without prior notice.

TEL: +886-49-2730888 | FAX: +886-49-2730999 | E-mail: prosales@probar.com.tw