


SHORT BAR FEEDER



P 680

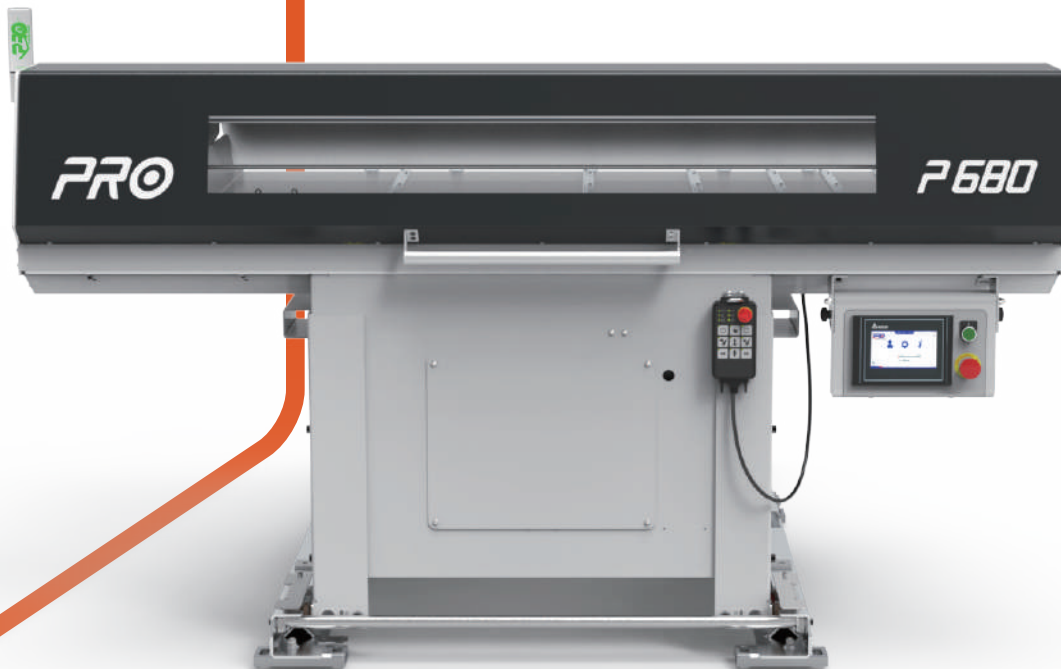


雙軸向移動座

雙軸向設計可輕易移動更換車床主軸與維修，兼具主軸收納功能，並可將滑軌收納以避免人員受傷。

Folding Axial Shift

Allows for maintenance access to the back of the lathe spindle for simple spindle liner changes.
Track is standard in X axis, with Z axis optional.

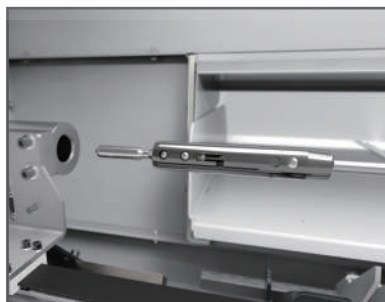


快速更換推桿

推、拿、放三步驟10秒快速更換。

Quick Change Pusher

Push, lift and insert the pusher in 10 seconds.

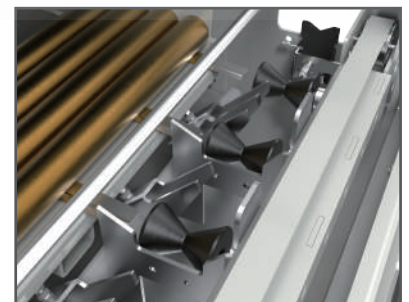

V型導輪



減少阻力與摩擦，大型棒材與多角棒材都能輕鬆送料。

V-Tray Rollers

Reduce friction and noise. Available for loading extra large and profiled material.

Specifications

棒材直徑	Bar Diameter	 圓棒材 6 ~ 80mm  六角棒 5 ~ 65mm  四方棒 5 ~ 50mm
棒材長度	Bar Length	152mm ~ 1600mm 棒材長度由主軸長度決定 Bar length depends on spindle length
棒材容量	Magazine Capacity	700mm Ø10mm x 78支(bar)
送料推桿	Bar Pusher	Ø6 Ø10 Ø19
換料時間	Automatic Cycle Reload Time	22 seconds
送料速度	Feed Speed	20mm ~ 500mm/sec
電源供應	Power Supply	220/440VAC 50/60Hz
X & Y移動滑座行程	X & Y Axial Track Travel	740mm
重量	Weight	350KG

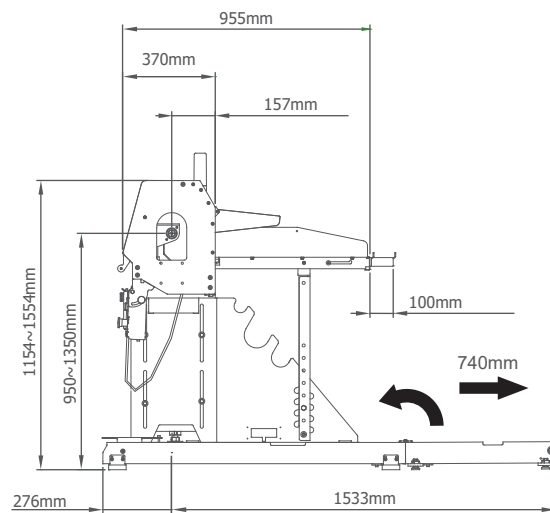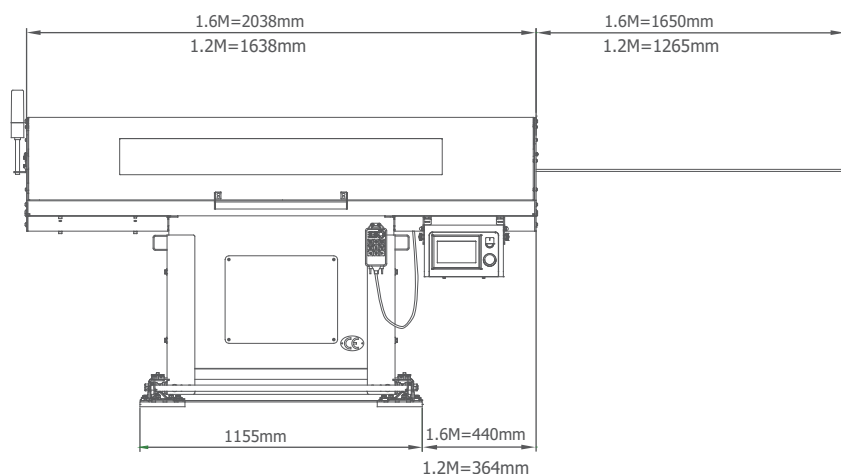

鐳羅機械股份有限公司
PRO MACHINERY CO., LTD.
 551 南投縣名間鄉濁水村磨坑巷1-1號
 No. 1-1, Mokeng Ln., Mingjian Township,
 Nantou County 551, Taiwan (R.O.C.)



設計如有變更 均不另行通知 Desgin and specifications are subject to change without prior notice.

TEL: +886-49-2730888 | FAX: +886-49-2730999 | E-mail: prosales@probar.com.tw